



Platform Lift



Description


The Companion Excel platform lift offers you total flexibility. The scissor mechanism, which raises and lowers the platform, is accommodated in a shallow pit so there is no lifting machinery or structure above the platform. This means that gates and handrails can be custom designed to suit the surroundings - we can also liase with specialist balustrade suppliers to precisely match the chosen finish. Furthermore, the platform can be supplied in any size and in 'through' or 'adjacent' entry configurations. The Excel, developed from our range of heavy-duty industrial platform lifts, is eminently suitable for installation outdoors and in public environments. Vandal resistant low voltage control stations are provided on the platform handrails and at each landing. The lift's power-pack is located within 3 metres of the pit and includes a manual lowering valve for use in the event of power failure.

Key Features:

Customised gates and handrails to suit surroundings
Complete flexibility of platform size and entrance configuration
Capacities from 400kg upwards to suit application

Robust construction and reliable operation - suitable for internal and external locations Very safe - including peripheral sensitive edge, underside guarding and interlocked gates

Excel with door

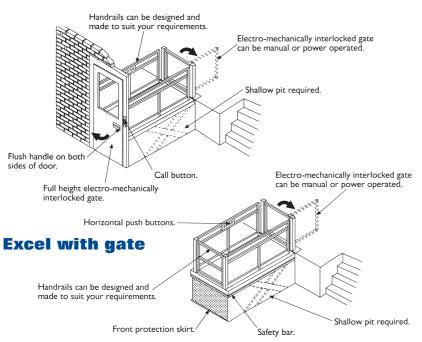

Typical Data:

400Kgs minimum uniformly distributed Travel Maximum 2000mm **Platform Size** To suit but typically 1600mm long x 1300mm wide Closed Height/Pit Denth Typically 250 - 500mm dependent on travel Varies but typically 80mm/sec approx. **Power Supply** 415v. 3ph 50HZ **Platform Controls** Constant pressure push-buttons - raise/lower/stop/alarm **Landing Controls** Call button provided at both upper and lower landings Gates/Doors & Handrails Clear glazed - 1100mm high - with single leaf manually operated hinged doors/gates giving a minimum clear access width of 900mm **Underside Guarding** Peripheral sensitive edge and flexible screen protecting mechanism Standard Finish Powder coat in colour to choice from RAL range



movemanSKG (a trading division of Otis Ltd)

123 Abbey Lane, Leicester LE4 5QX.

Telephone: 0116 225 2100 Fax: 0116 261 0397

email: sales@movemanskg.co.uk Website: www.movemanskg.co.uk